

Blue Diamond Industries

www.bdiky.com

Blue Diamond Microduct

3-Way Triangle


Features & Benefits:

- Blue Diamond SuperGlide®, a permanent friction reducing liner, standard in all microduct.
- Ribbed inside standard in all microduct, for enhanced fiber cable blowing distances.
- Available in regular or heavy wall, for more demanding applications.
- Option for 20ga insulated copper tracer wire.
- Available in other sizes upon request.
- Color options include:



*Special colors may be available

- For additional options please contact your Blue Diamond sales representative.

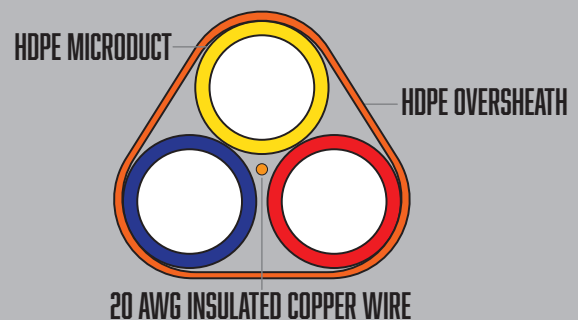

Size OD/ID	Weight LBS/FT	Bend Radius Unsupported IN	Max Fiber Count	Fiber OD Range MM
27/20	0.168	24	432	10.0-16.0
22/16	0.117	20	432	7.8-12.4
18/14	0.065	17	288	6.8-10.9
16/13	0.044	15	288	6.4-10.2
16/12	0.057	15	192	5.8-9.2
14/10	0.049	14	144	5.0-7.9
12.7/10	0.031	13	144	4.9-7.8
10/8	0.018	11	96	4.0-6.3
8.5/6	0.019	9	96	3.0-4.7
7/3.5	0.010	8	48	2.7-4.3
5/3.5	0.007	7	12	1.7-2.7