


# Blue Diamond Industries

[www.bdiky.com](http://www.bdiky.com)

## 2-WAY MICRODUCT

- Blue Diamond SuperGlide®, a permanent friction reducing liner, standard in all microduct.
- Ribbed Inside standard in all microduct, for enhanced fiber cable blowing distances.
- Available in regular or heavy wall, for more demanding applications.
- Option for 20ga insulated copper tracer wire.
- Available in other sizes upon request.
- Color options include orange, blue, black, green, red, yellow, white, gray, brown. Other color options available upon request.
- For additional options please contact your Blue Diamond sales representative.

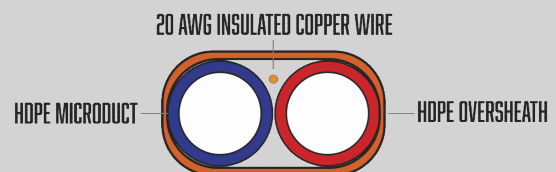

Microduct Size (mm)	Nominal OD (in)	Oversheath Wall Regular/Heavy (in)	Package Weight lbs/ft	Bend Radius Supported/Unsupported (in)	Safe Pull (lbs)
22/16	1.872	0.07/0.10	0.371	19/37	1063
18/14	1.557	0.07/0.10	0.245	16/31	879
16/13	1.400	0.07/0.10	0.191	14/28	787
16/12	1.400	0.07/0.10	0.216	14/28	787
14/10	1.242	0.07/0.10	0.188	12/25	695
12.7/10	1.140	0.07/0.10	0.145	11/23	635
12/8	1.085	0.07/0.10	0.160	11/22	602
10/8	0.927	0.07/0.10	0.103	9/19	510
10/6	0.927	0.07/0.10	0.131	9/19	510

\* PPI recommended 20 times OD for supported bend radius and 40 times for unsupported bend radius

\*\* Safe pull strength is computed at approximately 40% yield, per ASTM F1962 Appendix X 1.1, for short duration HDD pulls.



ISO 9001  
Quality

Blue Diamond Industries, LLC • 4040 Finn Way, Suite 240 • Lexington, KY 40517  
(859) 224-0415 • [www.bdiky.com](http://www.bdiky.com)

**BLUE DIAMOND**   
Industries, LLC