


# Blue Diamond Industries

[www.bdiky.com](http://www.bdiky.com)

## 3-WAY MICRODUCT

- Blue Diamond SuperGlide®, a permanent friction reducing liner, standard in all microduct.
- Ribbed Inside standard in all microduct, for enhanced fiber cable blowing distances.
- Available in regular or heavy wall, for more demanding applications.
- Option for 20ga insulated copper tracer wire.
- Available in other sizes upon request.
- Color options include orange, blue, black, green, red, yellow, white, gray, brown. Other color options available upon request.
- For additional options please contact your Blue Diamond sales representative.

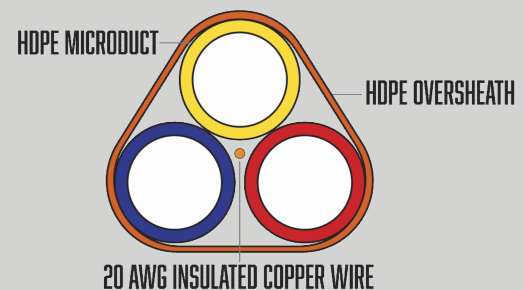

Microduct Size (mm)	Nominal OD (in)	Oversheath Wall Regular/Heavy (in)	Package Weight lbs/ft	Bend Radius Supported/Unsupported (in)	Safe Pull (lbs)
22/16	2.006	0.07/0.10	0.513	20/40	1260
18/14	1.667	0.07/0.10	0.331	17/33	1040
16/13	1.497	0.07/0.10	0.254	15/30	930
16/12	1.497	0.07/0.10	0.292	15/30	930
14/10	1.328	0.07/0.10	0.253	13/27	820
12.7/10	1.217	0.07/0.10	0.191	12/24	748
12/8	1.158	0.07/0.10	0.215	12/23	710
10/8	0.988	0.07/0.10	0.133	10/20	600
10/6	0.988	0.07/0.10	0.176	10/20	600

\* PPI recommended 20 times OD for supported bend radius and 40 times for unsupported bend radius

\*\* Safe pull strength is computed at approximately 40% yield, per ASTM F1962 Appendix X 1.1, for short duration HDD pulls.



ISO 9001  
Quality

Blue Diamond Industries, LLC • 4040 Finn Way, Suite 240 • Lexington, KY 40517  
(859) 224-0415 • [www.bdiky.com](http://www.bdiky.com)

**BLUE DIAMOND**   
Industries, LLC