


Blue Diamond Industries

www.bdiky.com

3-WAY FLAT MICRODUCT

- Blue Diamond SuperGlide®, a permanent friction reducing liner, standard in all microduct.
- Ribbed Inside standard in all microduct, for enhanced fiber cable blowing distances.
- Available in regular or heavy wall, for more demanding applications.
- Option for 20ga insulated copper tracer wire.
- Available in other sizes upon request.
- Color options include orange, blue, black, green, red, yellow, white, gray, brown. Other color options available upon request.
- For additional options please contact your Blue Diamond sales representative.

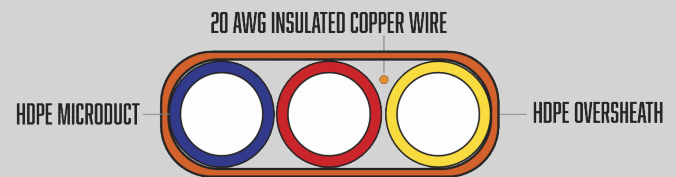

Microduct Size (mm)	Nominal OD (in)	Oversheath Wall Regular/Heavy (in)	Package Weight lbs/ft	Bend Radius Supported/Unsupported (in)	Safe Pull (lbs)
22/16	2.738	0.07/0.10	0.538	27/55	1457
18/14	2.266	0.07/0.10	0.352	23/45	1201
16/13	2.030	0.07/0.10	0.272	20/41	1073
16/12	2.030	0.07/0.10	0.311	20/41	1073
14/10	1.794	0.07/0.10	0.269	18/36	945
12.7/10	1.640	0.07/0.10	0.206	16/33	862
12/8	1.557	0.07/0.10	0.228	16/31	817
10/8	1.321	0.07/0.10	0.144	13/26	690
10/6	1.321	0.07/0.10	0.187	13/26	690

* PPI recommended 20 times OD for supported bend radius and 40 times for unsupported bend radius

** Safe pull strength is computed at approximately 40% yield, per ASTM F1962 Appendix X 1.1, for short duration HDD pulls.



ISO 9001
Quality

Blue Diamond Industries, LLC • 4040 Finn Way, Suite 240 • Lexington, KY 40517
(859) 224-0415 • www.bdiky.com

BLUE DIAMOND 
Industries, LLC