


Blue Diamond Industries

www.bdiky.com

4-WAY FLAT MICRODUCT

- Blue Diamond SuperGlide®, a permanent friction reducing liner, standard in all microduct.
- Ribbed Inside standard in all microduct, for enhanced fiber cable blowing distances.
- Available in regular or heavy wall, for more demanding applications.
- Option for 20ga insulated copper tracer wire.
- Available in other sizes upon request.
- Color options include orange, blue, black, green, red, yellow, white, gray, brown. Other color options available upon request.
- For additional options please contact your Blue Diamond sales representative.

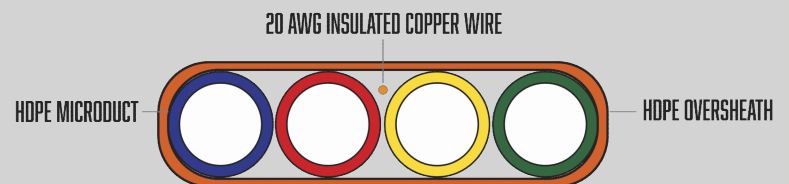

Microduct Size (mm)	Nominal OD (in)	Oversheath Wall Regular/Heavy (in)	Package Weight lbs/ft	Bend Radius Supported/Unsupported (in)	Safe Pull (lbs)
22/16	3.605	0.07/0.10	0.706	36/72	1851
18/14	2.975	0.07/0.10	0.459	30/59	1524
16/13	2.660	0.07/0.10	0.354	27/53	1360
16/12	2.660	0.07/0.10	0.405	27/53	1360
14/10	2.345	0.07/0.10	0.351	23/47	1196
12.7/10	2.140	0.07/0.10	0.266	21/43	1090
12/8	2.030	0.07/0.10	0.297	20/41	1032
10/8	1.715	0.07/0.10	0.186	17/34	869
10/6	1.715	0.07/0.10	0.243	17/34	869

* PPI recommended 20 times OD for supported bend radius and 40 times for unsupported bend radius

** Safe pull strength is computed at approximately 40% yield, per ASTM F1962 Appendix X 1.1, for short duration HDD pulls.



ISO 9001
Quality

Blue Diamond Industries, LLC • 4040 Finn Way, Suite 240 • Lexington, KY 40517
(859) 224-0415 • www.bdiky.com

BLUE DIAMOND 
Industries, LLC