


Blue Diamond Industries

www.bdiky.com

4-WAY MICRODUCT

- Blue Diamond SuperGlide®, a permanent friction reducing liner, standard in all microduct.
- Ribbed Inside standard in all microduct, for enhanced fiber cable blowing distances.
- Available in regular or heavy wall, for more demanding applications.
- Option for 20ga insulated copper tracer wire.
- Available in other sizes upon request.
- Color options include orange, blue, black, green, red, yellow, white, gray, brown. Other color options available upon request.
- For additional options please contact your Blue Diamond sales representative.

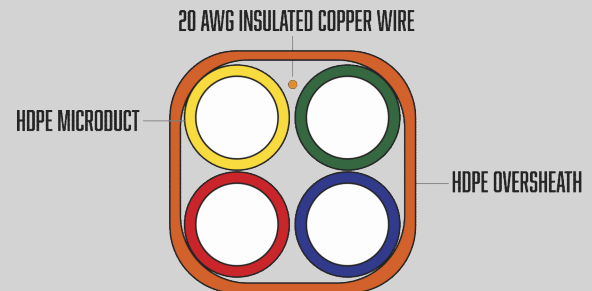

Microduct Size (mm)	Nominal OD (in)	Oversheath Wall Regular/Heavy (in)	Package Weight lbs/ft	Bend Radius Supported/Unsupported (in)	Safe Pull (lbs)
22/16	2.231	0.07/0.10	0.655	22/45	1457
18/14	1.851	0.07/0.10	0.417	19/37	1201
16/13	1.661	0.07/0.10	0.317	17/33	1073
16/12	1.661	0.07/0.10	0.368	17/33	1073
14/10	1.471	0.07/0.10	0.319	15/29	945
12.7/10	1.347	0.07/0.10	0.237	13/27	862
12/8	1.281	0.07/0.10	0.269	13/26	817
10/8	1.090	0.07/0.10	0.163	11/22	690
10/6	1.090	0.07/0.10	0.220	11/22	690

* PPI recommended 20 times OD for supported bend radius and 40 times for unsupported bend radius

** Safe pull strength is computed at approximately 40% yield, per ASTM F1962 Appendix X 1.1, for short duration HDD pulls.



ISO 9001
Quality

Blue Diamond Industries, LLC • 4040 Finn Way, Suite 240 • Lexington, KY 40517
(859) 224-0415 • www.bdiky.com

BLUE DIAMOND 
Industries, LLC